

DESCRIPTION

The T-HUB4-I is a Laboratory-quality high speed **USB 2.0** 4 port Hub approved for use with the full range of Telemakus **USB** products.

3 front panel and one rear panel outputs allow for easy cascading of 2 or more Hubs.

Can be powered by **USB** port or external **5V AC/DC** adapter (not supplied)



RF DESIGN SERVICES

Provisional


**T-HUB4-I** Rev A June 2012

BENEFITS

- Custom **USB** 4 Port **HUB**
- USB 2.0** Interface
- Basic Level Performance

FEATURES

- Cascadable
- Self Powered from **USB**

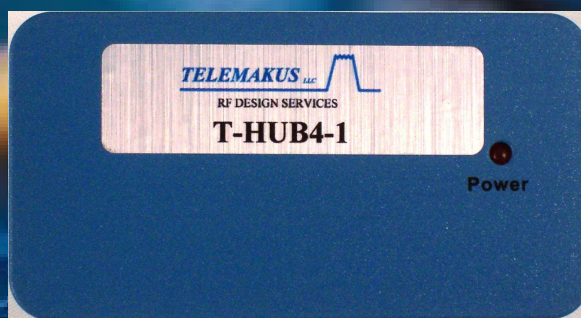

Phone: 916 458 6346  
Fax: 916 983 8713  
Email: [mail@telemakus.com](mailto:mail@telemakus.com)  
[www.telemakus.com](http://www.telemakus.com)

Primary Business Address  
13405 Folsom Blvd #502  
**F O L S O M**  
**C A , 9 5 6 3 0**



# T-HUB4-I **Provisional**


Rev A June 2012

## Ordering information

Model	Power	Input Connector	Output Connector
T-HUB4-I	USB	I Type B	4 Type A

## Specifications

Parameter	Specification
Output Current	0.5A Each
Output Voltage	5V Nominal
Supply Voltage	5V 2A min
Low Speed	1.5MB
Full Speed	12MB
High Speed	488MB
AC/DC Adapter	Not Included

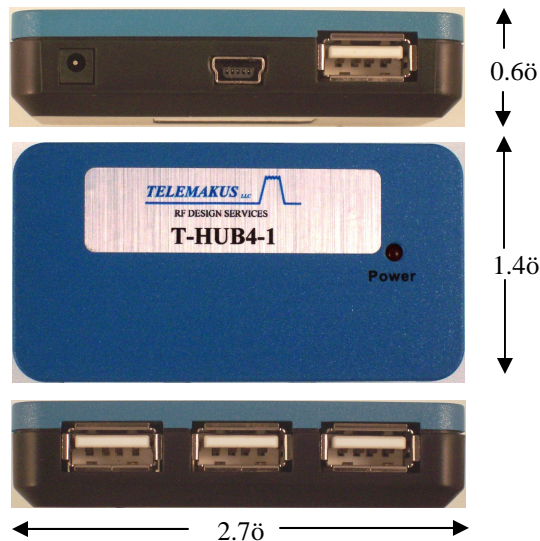

## Environmental

Temperature Range	-40 to +55 degC		
-------------------	-----------------	--	--



RF DESIGN SERVICES

Phone: 916 458 6346  
 Fax: 916 983 8713  
 Email: mail@telemakus.com  
 www.telemakus.com

Primary Business Address  
 13405 Folsom Blvd #502  
 Folsom  
 CA, 95630